

# SCL RUST REMOVER



## TECHNICAL BULLETIN

### Description/Features

Formulated to remove yellowing stains commonly seen on flamed and polished surface granite and the stain is less than 2 weeks old. Fertilizer/soil stain on granite pavement is also ideal to use SCL-Rust Remover.

### Application Procedures of SCL-Rust Remover :

1. Put SCL-Rust Remover in a painting tray or a small pail. Dip the roller into the solution.
2. Begin to roll the solution onto the yellowing stains. Let the chemical saturate for at least 15 minutes and maximum 45 minutes.
3. When the stain fade away, immediately mop the area with SCL-Stoneclean Xtra. Mix Stoneclean Xtra solution with water.
4. If yellow stain remains after 45 minutes of saturation, chances are, you have to use RA2[A+B]+DPP Poultice Powder.
5. Therefore, test a small area before applying rust remover on the entire area.


### Cautions:

- Do not used SCL-Rust Remover on a polished marble.
- Do not allow SCL-Rust Remover to dry on the granite surface.
- Test a small area before applying the solution on the entire area.



### SCL STONECLEAN-Xtra

Mix 60ml / 120ml of Stoneclean Xtra solution with one gallon of water.

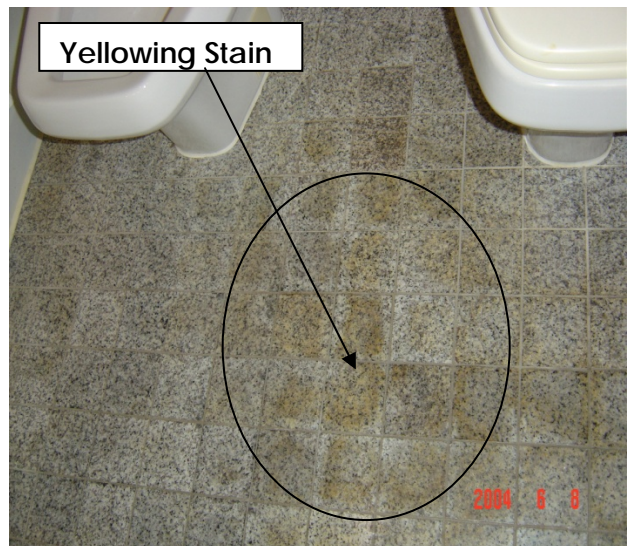

### Benefits:

- ✓ Ready-to-use solution
- ✓ Shine remains on polished granite.
- ✓ Removed yellowing stains that are caused by improper chemicals.
- ✓ Removed stain caused by soil.
- ✓ Prevent oxidation on granite stone.

### Available sizes:

1 litre, 5-litres & 25 litres

